

FACT SHEET

ICT-TC-GFSP-SF-EP-5040



Silicone-free, high-performance gap filler pad delivering 13.0 W/m-K thermal conductivity with excellent electrical insulation and low outgassing.



5 GAP FILLERS, PADS, SPACERS, SOFT-ULTRA-SOFT GEL SILICONE-FREE

DESCRIPTION


The **ICT-TC-GFSP-SF-EP-5040 Series** is the latest product generation of silicone-free, high-performance, thermally conductive gap filler pads from ICT SUEDWERK. These product series are composed of a silicone-free, resin-based thermoplastic elastomer (TPE).

The **ICT-TC-GFSP-SF-EP-5040 Series** is characterized by very high thermal conductivity of 13.00 W/m-K combined with outstanding electrical insulation properties, based on advanced composite material technologies, while also maintaining silicone's superior heat resistance. This premium product has no low-molecular siloxane volatilization whatsoever, and very low total volatile gas.


The **ICT-TC-GFSP-SF-EP-5040 Series** is soft, flexible, and exhibits good springback behavior. Its low hardness ensures excellent compressibility, while its stress relaxation properties, low specific weight, and very good price-performance ratio are what make this material stand out.

The **ICT-TC-GFSP-SF-EP-5040 Series** is available in material thicknesses ranging from 0.5 to 10.00 mm. Additional thicknesses are available upon request.

TYPICAL PROPERTIES

Product Configuration	Material structure
ONE - LAYER TYPE SILICONE FREE RESIN BASED THERMOPLASTIC ELASTOMER	 tacky tacky
Color	Gray
Density	3.3 g/cm ³
Thermal conductivity	13 W/m*K
Thermal impedance @ 20 psi	≤ 0.131 C°-in ² /W
Volume resistivity	≥ 1,00 × 10 ¹⁰ Ω/m
Dielectric breakdown voltage	8 kV/mm
Hardness (Shore 00)	50
Compressibility @ 20psi	32 %

IMAGES

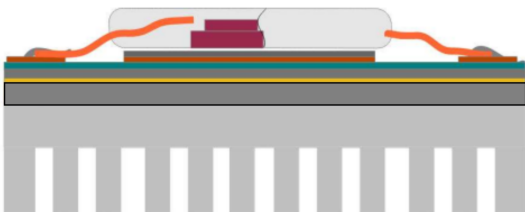

Product Profile (schematic image)

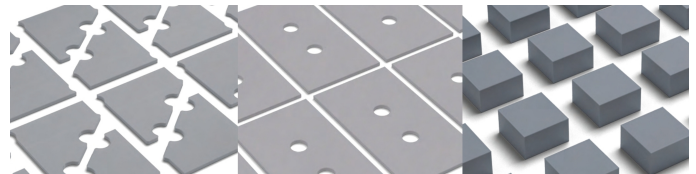


Image may differ from product

Fotos / Beispiele

FEATURES

- › Made from a silicone-free, resin-based material
- › High thermal performance: **13.0 W/m-K thermal conductivity / R_{th} 0.131 °C-in²/W (@ 20 psi)**
- › Tacky surface for good surface contact
- › Soft and flexible, with very good compressibility
- › Effective operation under low contact pressure
- › Excellent electrical insulation (UL 94 V-0 certified)
- › The ICT-TC-GFSP-SF-EP-5040 Series is environmentally compliant with RoHS 2.0, halogen-free, and REACH standards

DELIVERY FORMS / APPLICATIONS

- Applicable to optical and sensitive electronic components
- Optoelectronic industry (viscous / tacky surface)
- HDDs and Netcom products
- EV and new energy battery applications
- 5G base stations and infrastructure
- Wearable equipment and related devices

ICT4TIM Partners



ICT SUEDWERK GmbH
INSPIRED CUSTOMIZED TIM SOLUTIONS

Bajuwarenring 12a • 82041 Oberhaching
Tel: +49 (0)892123102-0 • Fax: +49 (0)892123102-10
Info@ict-suedwerk.de • www.ict-suedwerk.de

